



DVT1 - Dual Output AC Power Supply

Overview:

DVT1 AC power supply converts 120VAC to 24VAC or 28VAC. Typical applications: power for CCTV cameras and accessories, Altronix SMP series power supplies.

Specifications:

- 24VAC or 28VAC secondary.
- 80VA output.
- Input voltage: 115VAC/.7 amp
- Line cord included

Case dimensions: 2.75"H x 4.5"W x 3.625"D

Installation Instructions:

1. Place DVT1 in desired location.
2. For 24VAC use terminals marked [A and C] (*Fig. 1*).
For 28VAC use terminals marked [A and B] (*Fig. 1*).
3. Insulate unused leads.
4. Connect line cord to 120VAC outlet.





Fig. 1

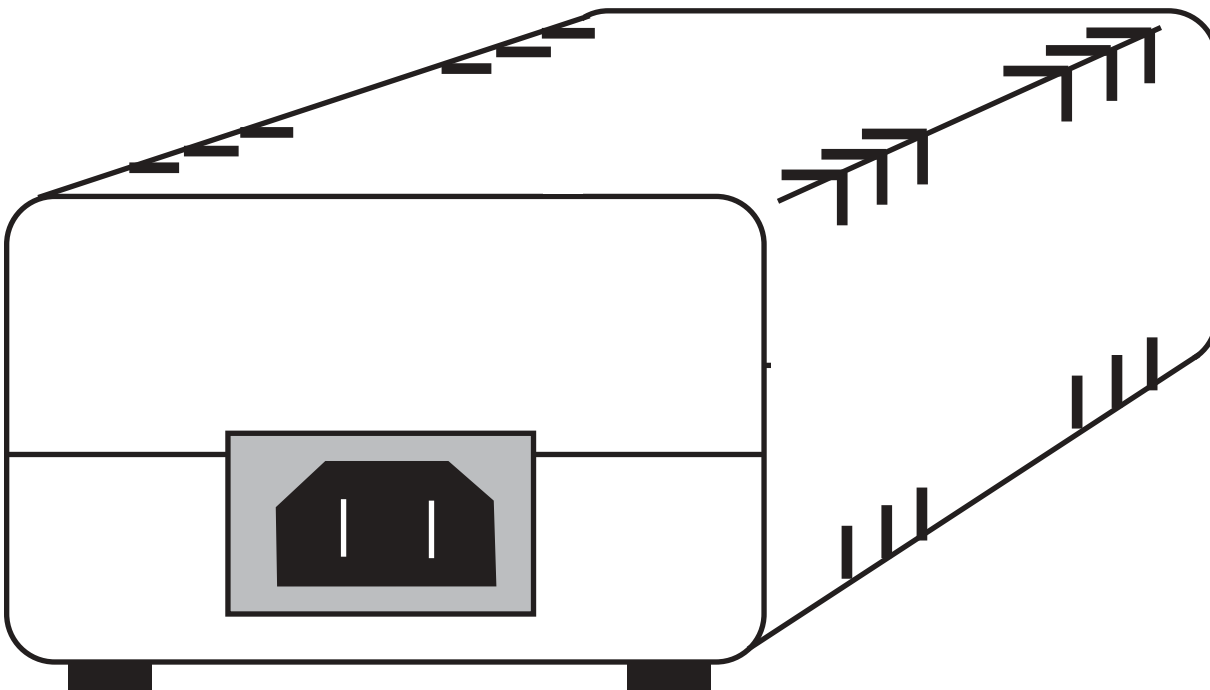

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.